


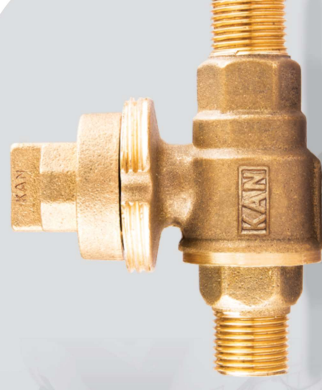

BALL STYLE CURB VALVE

Definition and Application of Corporation Valve


It is a kind of valve that is opened and closed through $\frac{1}{4}$ of the round. It is of Plug Style Valve. This valve is used to disconnect and connect water flow before entrance door of the property for management purpose. Moreover, this type of valve is used when something happens between curb valve and water meter box. Also, it provides the possibility of providing and production by five-layer couplings (PEX-AL-PEX Pipe) as well.

The place for installation

This type of valve is installed outside the subscriber's property, hidden beneath the cell.

Key Points

- The valve cap should be in upward direction.
- Work Temperature: 2-35 Degrees Centigrade.
- Work Pressure: 10 Atmosphere/ pn

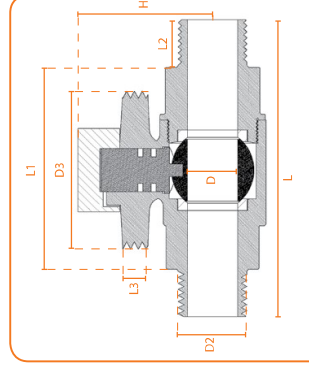

There is a possibility of providing and producing through DZR or Lead free Bronze depends on the order.

قطعات و جنس آنها				نام قطعه	
سیمبول	استاندارد EN	استاندارد ASTM	جنس		
CuSn5Zn5PB5-C	EN1982 \ CC491K	ASTM B62 \ C83600	برنز	پدنه	
CuZn39PB3	EN12164 \ CW614N	ASTM B455 \ C38500	برنز / نیکل / کرم	توبی	
CuZn39PB3	EN12164 \ CW614N	ASTM B455 \ C38500	برنز	ساقی	
CuZn39PB3	EN12164 \ CW614N	ASTM B455 \ C38500	برنز	کلاهی	
	NBR EPDM		لاستیک	واشر اورینگ ساقی	
	PTFE		فلون	واشر توبی	

ابعاد دنده			دنده طرفین			دنده بالا			Size (inch)		
تعداد دنده	D3	L3	تعداد دنده	D2	L2	تعداد دنده	D3	L3	Size	H	L
11	48	8	14	20.7	14.3	13-15	60	50	90	50	90
11	48	8	14	25.9	15.9	19-20	63.5	60	95	60	95
11	48	10	11	32.8	19.1	25-26	72	70	110	70	110

All dimension are in millimeter.

قطعات مجاور		ردیف	
محل قرار گیری	نام	ردیف	
درزگیر قطعه	پایه شیر انشعاب	۱	
طرفین	بست ماده / معززی یکسر بوش فیت	۲	
بالای قطعه	مخزن شیر انشعاب	۳	

