





SERVIS CLAMP

Definition and Application of Servis Clamp

Characteristics: It is used to make an extension line from the main pipe without disconnection of water. It can be provided in sizes 60-400 for all sizes of extension lines. Those used in bottom area are made of ducttail cast according to 1693 DIN Standard. The threads are made according to AWWA-C800 standard. The crepes are made of iron, integrated without any weld/installed outside the subscriber's property, hidden and mounted on the pipe.

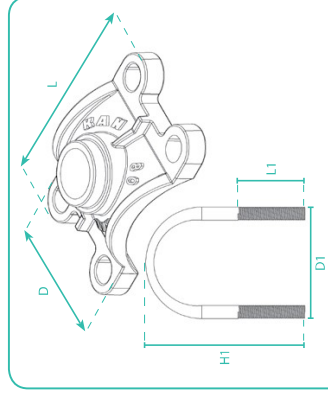

ابعاد کبری				ابعاد کفی				سایز اصلی لوله	سایز انشعاب قابل ارائه (inch)
d	h1	D1	L1	H	D	L			
14	160	96	80	50	88	135		60	1 1/2
14	175	120	80	50	98	145		80	1 1/2
14	175	140	85	57	94	172		100	2 1/2
14	225	210	85	78	110	255		150	2 1/2
14	295	235	90	91	100	295		200	2 1/2
14	310	295	100	110	115	370		250	2 1/2
14	360	355	100	100	115	400		300	2 1/2
16	425	405	100	105	115	475		350	2 1/2
16	500	465	100	105	115	535		400	2 1/2

The minimum length of the thread and water service clamps should equal to that of the entrance gear thread of the connection valve to the Muller network.

