




FLANGE SOCKET

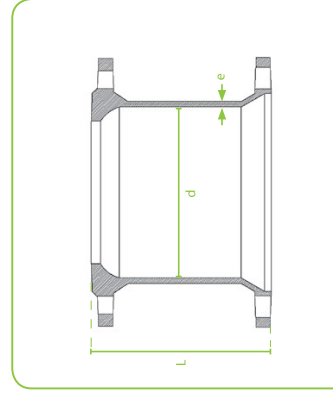

Definition and Application

It is used to flange cast iron pipes and to connect flanged valves and fittings.

- Flange standard according to DIN EN 1092.
- Dimensions standard according to ISO 2531.
- Casting standard according to DIN EN 1693.

Key points

- When using this kind of flange, the surface of the cut section of the pipe should be smooth and vertical.
- Flat or patched rubber gaskets are used to seal the flanged parts.
- To seal the bolted part where the pipe enters the interior couplings, bolted gland gasket with bolted gland is used.
- It enjoys bentoniti/ primer/bitumen cover as per the order placed by customers to prevent corrosion.

ابعاد			ابعاد			سایز
e	d	L	e	d	L	
10.2	395	250	7	87	180	60
10.8	435	295	7	104	150	80
12	535	285	7.2	125	170	100
13.2	640	300	7.8	185	180	150
14.4	740	320	8.4	239	185	200
15.6	845	340	9	280	210	250
16.8	945	350	9.6	340	205	300

ابعاد بر حسب میلی متر می باشد.



COLLAR


Definition and Application

It is used as a connector to connect two valves and repair of valve at the time of burst.

- Dimensions standard according to ISO 2531.
- Casting standard according to DIN EN 1693.

Key points

- When using this kind of flange, the surface of the cut section of the pipe should be smooth and vertical.
- To seal the bolted part where the pipe enters the interior couplings, bolted gland gasket with bolted gland is used.
- It enjoys bentoniti/ primer/bitumen cover as per the order placed by customers to prevent corrosion.

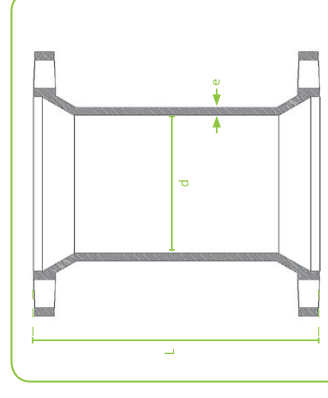

ابعاد			ابعاد			سایز
e	d	L	e	d	L	
10.2	395	305	7	87	200	60
10.8	435	305	7	104	225	80
12	535	360	7.2	125	250	100
13.2	640	400	7.8	185	260	150
14.4	740	430	8.4	239	270	200
15.6	845	500	9	280	300	250
16.8	945	550	9.6	340	270	300

ابعاد بر حسب میلی متر می باشد.

