



DOUBLE-FLANGED 11.25° (1/32) BENDS


Definition and Application

It is used to connect two pipes with double flanged tee that are located at an angle of 11.25 degrees.

- Flange standard according to DIN EN 1092-2.
- Dimensions standard according to ISO 2531.
- Casting standard according to DIN EN 1693.

Key points

- Flange standard according to DIN EN 1092-2.
- Dimensions standard according to ISO 2531.
- Casting standard according to DIN EN 1693.

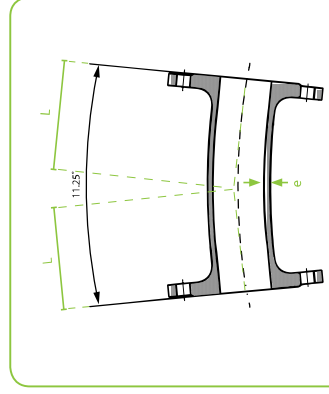

ابعاد		ابعاد	
e	L	Nominal Diameter (DN)	
10.8	324	400	80
12	375	500	100
13.2	426	600	150
14.4	478	700	200
15.6	529	800	250
16.8	581	900	300
18	632	1000	350

ابعاد بر حسب میلی متر می باشد.



DOUBLE-FLANGED 22.5° (1/16) BENDS

Definition and Application

It is used to connect two pipes with double flanged tee that are located at an angle of 22.5 degrees.

- Flange standard according to DIN EN 1092-2.
- Dimensions standard according to ISO 2531.
- Casting standard according to DIN EN 1693.

Key points

- Flat or patched rubber gaskets are used to seal the flanged parts.
- It enjoys bentoniti/primer/bitumen cover as per the order placed by customers to prevent corrosion.

ابعاد		ابعاد	
e	L	Nominal Diameter (DN)	
10.8	234	400	80
11.4	349	450	100
12	375	500	125
13.2	426	600	150
14.4	478	700	200
15.6	529	800	250
16.8	581	900	300
18	632	1000	350

ابعاد بر حسب میلی متر می باشد.

