



DOUBLE-FLANGED 45° (1/8) BENDS


Definition and Application

It is used to connect two pipes with double flanged tee that are located at an angle of 45 degrees.

- Flange standard according to DIN EN 1092-2.
- Dimensions standard according to ISO 2531.
- Casting standard according to DIN EN 1693.

Key points

- Flat or patched rubber gaskets are used to seal the flanged parts.
- It enjoys bentoniti/primer/bitumen cover as per the order placed by customers to prevent corrosion.

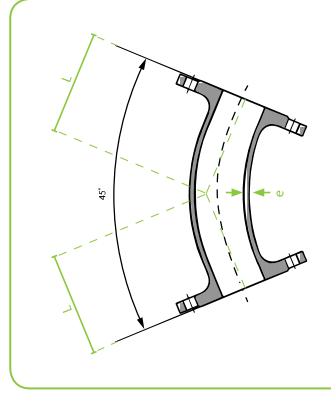

DOUBLE-FLANGED 90° (1/4) BENDS

Definition and Application

It is used to connect two pipes with double flanged tee that are located at an angle of 90 degrees.

- Flange standard according to DIN EN 1092-2.
- Dimensions standard according to ISO 2531.
- Casting standard according to DIN EN 1693.

Key points

- Flat or patched rubber gaskets are used to seal the flanged parts.
- It enjoys bentoniti/primer/bitumen cover as per the order placed by customers to prevent corrosion.

ابعاد			ابعاد		
e	L	Nominal Diameter (DN)	e	L	Nominal Diameter (DN)
10.8	234	400	7	130	80
11.4	349	450	7.2	140	100
12	375	500	7.5		125
13.2	426	600	7.8	160	150
14.4	478	700	8.4	180	200
15.6	529	800	9	350	250
16.8	581	900	9.6	400	300
18	632	1000	10.2	298	350

ابعاد بر حسب میلی متر می باشد.

ابعاد			ابعاد		
e	L	Nominal Diameter (DN)	e	L	Nominal Diameter (DN)
10.8	234	400	7	130	80
11.4	349	450	7.2	140	100
12	375	500	7.5		125
13.2	426	600	7.8	160	150
14.4	478	700	8.4	180	200
15.6	529	800	9	350	250
16.8	581	900	9.6	400	300
18	632	1000	10.2	298	350

ابعاد بر حسب میلی متر می باشد.

