



BLANK FLANGE


Definition and Application

It is used to block the end of flanged pipe and each flanged coupling is used.

- Flange standard according to DIN EN 1092-2.
- Dimensions standard according to ISO 2531.
- Casting standard according to DIN EN 1693.

Key points

- Flat or patched rubber gaskets are used to seal the flanged parts.
- It enjoys bentoniti/ primer/bitumen cover as per the order placed by customers to prevent corrosion.

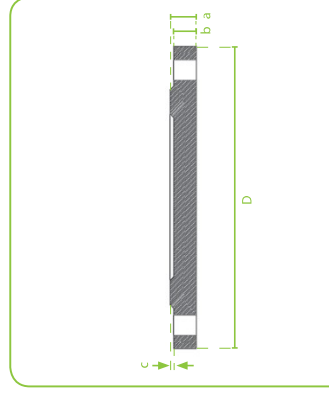

ابعاد					ابعاد				
c	b	a	D	DN	c	b	a	D	DN
4	20.5	24.5	585	400	3	16	19	200	80
4	22.5	26.5	670	500	3	16	19	220	100
5	25	30	780	600	3	16	19	285	150
5	27.5	32.5	895	700	3	17	20	340	200
5	30	35	1015	800	3	19	22	400	250
5	32.5	37.5	1115	900	4	20.5	24.5	455	300
5	35	40	1230	1000	4	20.5	24.5	505	350

ابعاد بر حسب میلی متر می باشد.



DOUBLE FLANGED PIPE

Definition and Application

In order to compensate the distance between the two pipes or flanged couplings, this part is used.

- Flange standard according to DIN EN 1092-2.
- Dimensions standard according to ISO 2531.
- Casting standard according to DIN EN 1693.

Key points

- Flat or patched rubber gaskets are used to seal the flanged parts.
- It enjoys bentoniti/ primer/bitumen cover as per the order placed by customers to prevent corrosion.
- Access of the holes on the two sides of the flange should be in one direction.

ابعاد				ابعاد			
e	L	Nominal Diameter (DN)	e	L	Nominal Diameter (DN)	e	L
9	80	250	7	20 / 30 / 40 / 50	80		
9.6	100	300	7.2	30 / 40 / 50	100		
10.8	150	400	7.8	30 / 40 / 50	150		
12	200	500	8.4	30 / 40 / 50	200		



ابعاد بر حسب میلی متر می باشد.