



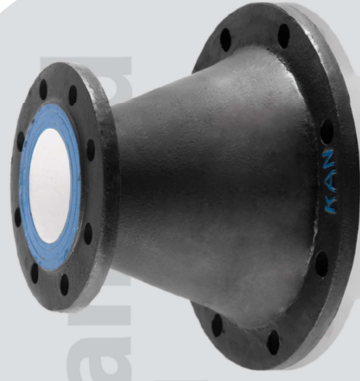

DOUBLE - FLANGE TAPER

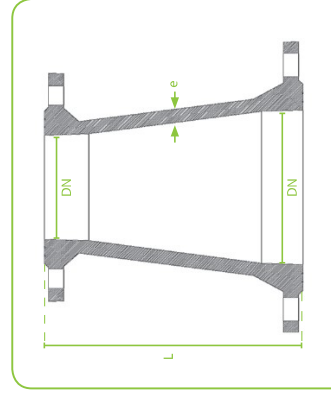

Definition and Application

It is used to connect two pipes with different diameters.

- Flange standard according to DIN EN 1092-2.
- Dimensions standard according to ISO 2531.
- Casting standard according to DIN EN 1693.

Key points

- Flat or patched rubber gaskets are used to seal the flanged parts.
- It enjoys bentonite/primer/bitumen cover as per the order placed by customers to prevent corrosion.
- The consistency between flanged holes with large and small diameters should be observed.

ابعاد		ابعاد	
e	L	Nominal Diameter (DN)	
7.8	300	150 x 100	7
8.4	600	200 x 100	7
8.4	300	200 x 150	7
9	600	250 x 150	7
9.6	600	300 x 150	7
9	300	250 x 200	7.2
9.6	600	300 x 200	7.8

ابعاد بر حسب میلی متر می باشد.

ابعاد		ابعاد	
e	L	Nominal Diameter (DN)	
14.4	800	700 x 400	10.2
14.4	750	700 x 450	10.8
14.4	700	700 x 500	9.6
14.4	600	700 x 600	10.2
15.6	900	800 x 450	10.8
15.6	800	800 x 500	10.2
15.6	700	800 x 600	10.8
15.6	600	800 x 700	12
16.8	1000	900 x 500	10.8
16.8	800	900 x 600	12
16.8	700	900 x 700	12
16.8	600	900 x 800	12
18	1000	1000 x 600	13.2
18	800	1000 x 700	13.2
18	700	1000 x 800	13.2
18	600	1000 x 900	13.2

ابعاد بر حسب میلی متر می باشد.

