




DUCTIL WATER COLLECTOR

Definition and Application of Servis Clamp

It is used to dive the extension lines in properties with more than two units. It is made of ducktail cast according to 1693 DIN Standard. The threads are made according to 800 AWWA Standard.

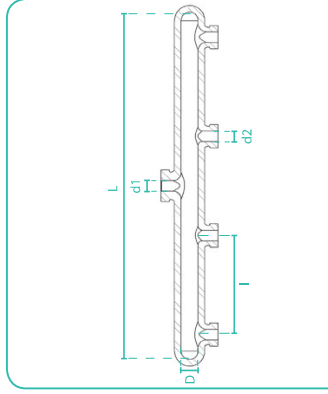

ابعاد					تعداد خروجی
طول کلکتور L (mm)	قطر انشعاب d1 (inch)	قطر انشعاب خروجی d2 (inch)	فاصله مرکز تا مرکز l (mm)	قطر داخلی D (mm)	
250	3/4	1/2	150	1	2
380	3/4				3
550	3/4				4
760	1				5
920	1	1 1/2		1 1/2	6
1070	1 1/2				7
1220	1 1/2				8

