



FLANGED SPIGOT


Definition and Application

It is used to provide the distance between the pipe and valve or the flanged coupling.

- Flange standard according to DIN EN 1092-2.
- Dimensions standard according to ISO 2531.
- Casting standard according to DIN EN 1693.

Key points

- Flat or patched rubber gaskets are used to seal the flanged parts.
- It enjoys bentoniti/primer/bitumen cover as per the order placed by customers to prevent corrosion.
- The simple part should be free from blow hole or curve.

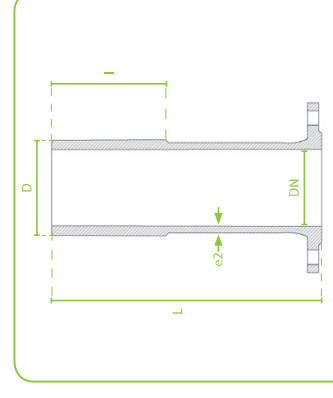

ابعاد			ابعاد			سایز		
e	I	L	e	I	L	e	I	L
10.8	270	500	7	215	350	80		
12	280	520	7.2	225	350	100		
13.2	290	560	7.8	225	410	150		
14.4	310	600	8.4	230	410	200		
15.6	330	600	9	240	410	250		
16.8	330	600	9.6	250	505	300		
17.5	330	700	10.2	260	460	350		

ابعاد بر حسب میلی متر می باشد.

انشعاب			بدنه			Size (DN)		
Type B	Type A	e2	Type B	Type A	e1	Size (dn)	Size (DN)	
410	---	10.2	725	---	10.8	350	400	
420	450	10.8	840	900	10.8	400	400	
420	400	7.8	650	1000	12	150	500	
440	400	8.4	650	1000	12	200	500	
450	400	9	650	1000	12	250	500	
460	400	9.6	650	1000	12	300	500	
480	500	10.8	885	1000	12	400	500	
500	500	12	1000	1000	12	500	500	
500	450	8.4	700	1100	13.2	200	600	
540	550	10.8	930	1100	13.2	400	600	
580	550	13.2	1165	1100	13.2	600	600	
---	525	8.4	---	650	14.4	200	700	
---	555	10.8	---	970	14.4	400	700	
---	600	14.4	---	1200	14.4	700	700	
---	585	8.4	---	690	15.6	200	800	
---	615	10.8	---	910	15.6	400	800	

ابعاد بر حسب میلی متر می باشد.

انشعاب			بدنه			Size (DN)		
Type B	Type A	e2	Type B	Type A	e1	Size (dn)	Size (DN)	
---	645	13.2	---	1350	15.6	600	800	
---	675	15.6	---	1350	15.6	800	800	
---	645	8.4	---	730	16.8	200	900	
---	675	10.8	---	950	16.8	400	900	
---	705	13.2	---	1500	16.8	600	900	
---	750	16.8	---	1500	16.8	900	900	
---	705	12	---	1650	18	500	1000	
---	735	15.6	---	1650	18	800	1000	
---	525	18	---	1650	18	1000	1000	

ابعاد بر حسب میلی متر می باشد.