




## MANHOLE COVER

### Definition and Application

It can be installed on public roads or roads of heavy traffic and access of wastewater pipes.

#### Features

- It is produced and tested according to BS EN 124 Class D400 Standard.
- It is made and produced according to DIN EN 1693 casting standard.
- It enjoys proper cover of 250 microns in thickness with desirable range of colors as selected by customers.
- It is made in two models namely with and without hinge
- Inter-door washer and body to prevent jump of door and noise.

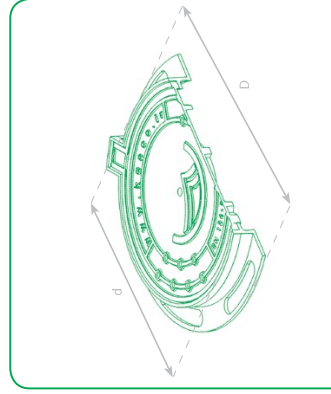

| گرددایا<br>D | گرددایا<br>d | ارتفاع | Co<br>ورودی | فشار<br>ایمن | فشار<br>تست | سایز |
|--------------|--------------|--------|-------------|--------------|-------------|------|
| 720          | 650          | 80     | 600         | 40 ton       | 42 ton      | 60   |
| 750          | 680          | 95     | 900         | 40 ton       | 42 ton      | 90   |

ابعاد بر حسب میلی متر می باشد.



## SEWAGE HINGED COVER

### Definition and Application

It can be installed on sewage extension lines.

#### Features

- It is produced and tested according to BS EN 124 Class 125 B Standard.
- Casting standard DIN EN1693 or DIN EN1691 (As requested by the party who placed the order).
- It enjoys a desirable cover of 250 microns in thickness with a desirable range of colors as selected by customers
- In two models with and without hinge.



| گرددایا | گرددایا | ارتفاع | Co<br>ورودی | فشار<br>ایمن | فشار<br>تست | مدل       |
|---------|---------|--------|-------------|--------------|-------------|-----------|
| 180     | 260     | 210    | 130         | 12.5 ton     | 14 ton      | لولا دار  |
| 200     | 285     | 70     | 180         | 12.5 ton     | 14 ton      | بدون لولا |

ابعاد بر حسب میلی متر می باشد.